


PCB Layout Diagram
Top View

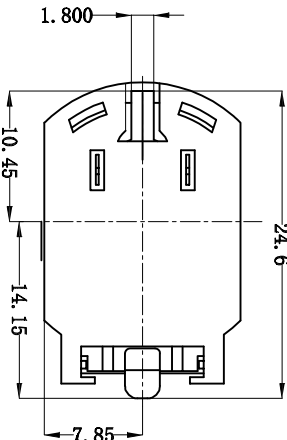

NOTE:

1. MATERIAL:

- a. HOUSING: PPA
- b. CONTACT: PHOSPHOR BRONZE
- (SURFACE PLATING: Au*U")

SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MI
- c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVE
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.20MM	Gold Plating and Ni Under-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.20MM	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

								TITLE:		電池座 SMT	
								CHECKED			
								APPROVALS		PART NO.	
										GP07-QR2032-13	
								TOLERANCES ARE		ANGLE	
								30~0.1		±0.30	
								10~30		±0.20	
								5~10		±0.15	
								~ 5		±0.10	
										±2°	
								UNIT: mm		SCALE: 1:1	
								DRAWING NO.		PROJ. 	
								SHEET 1 OF 1			
ECN NO.		REV.		DATE.		DESCRIPTION.		CHANGE.		CHECK.	
A						NEW				APPRO.	