


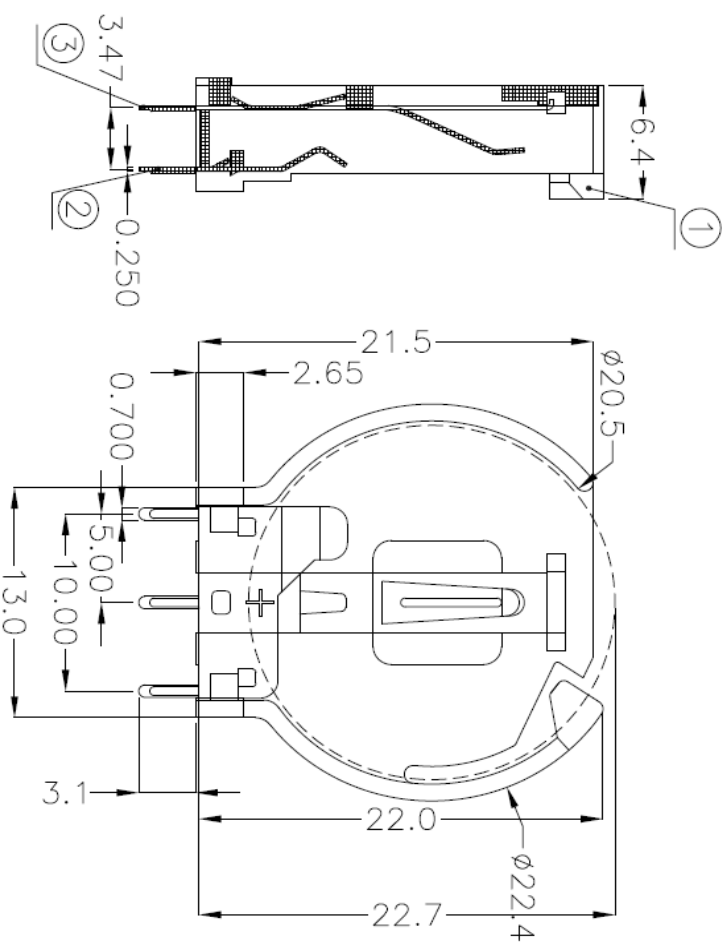

NOTE:

1.MATERIAL:


- a.HOUSING:PA66 UL94V-0
- b.CONTACT:PHOSPHOR BRONZE
- (SURFACE PLATING: Ni100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -55°C~ +105°C

PCB Layout Diagram
Top View

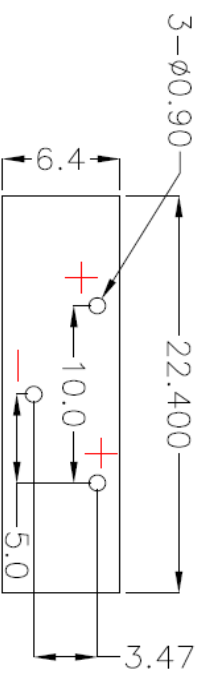

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07	TITLE: 2032-5-3 DIP			
CHECKED			PART NO. GP07-CR2032-15			
APPROVALS			SCALE: 1:1			
TOLERANCES ARE		30~0.15 10~0.20 5~0.10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°	UNIT: mm	PROJ. 
DRAWING NO.			SHEET 1 OF 1			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			