
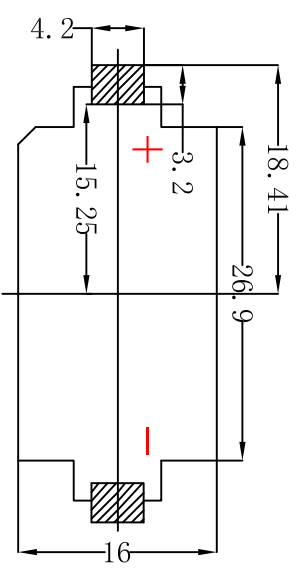
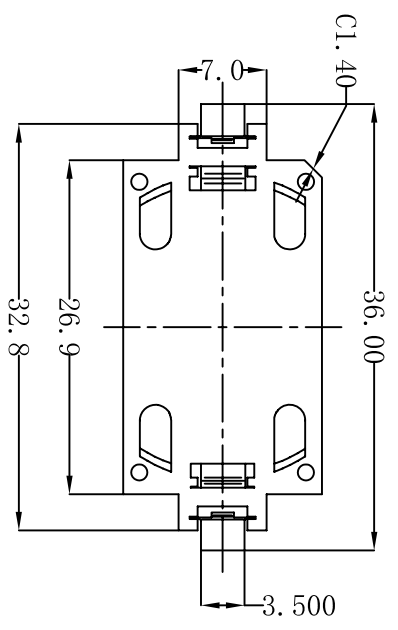
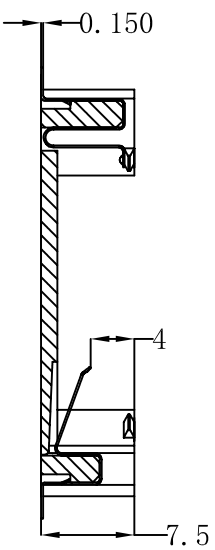


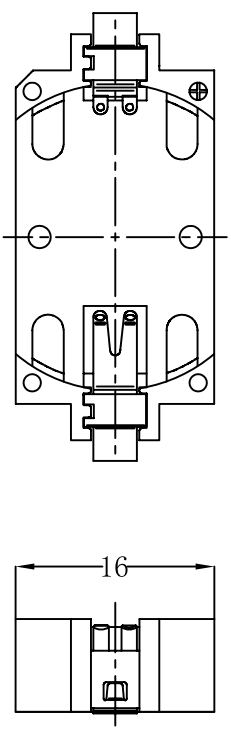

PCB Layout Diagram
Top View

NOTE:
1. MATERIAL:
a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
b. CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: A*U")
SEE ORDERING INFORMATION

2. ELECTRIC:
a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
d. OPERATING TEMPERATURE: -25° C ~ +85° C

APPROVALS		DATE	TITLE: 电池座		PART NO. GP07-CR2450-02		SCALE: 1:1		PROJ. 1 OF 1	
DRAWN	ZHWEI.CHEN	2015.07.07								
CHECKED										
APPROVALS										
TOLERANCES ARE		30~0.1	±0.30	ANGLE	UNIT: mm		SCALE: 1:1		PROJ. 1 OF 1	
		10~0.10	±0.20							
		5~0.10	±0.15							
		~ 5	±0.10	±2°	DRAWING NO.					
ECN NO.		REV.	DATE.	DESCRIPTION.		CHANGE.	CHECK.	APPRO.		
		A		NEW						