


Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜/镀底30u"MIN/表面镀金0.8u"MIN
 Contact: Brass/0.8u"MIN GOLD PLATING
 OVER ALL 30U"MIN NICKEL UNDERPLATING
 OVER ALL




2-特性 (Characteristics):

额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20mΩ MAX.
 Contact Resistance: 20mΩ MAX.
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance: 1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40度至+105度
 Temperature Range: -40°Cto +105°C

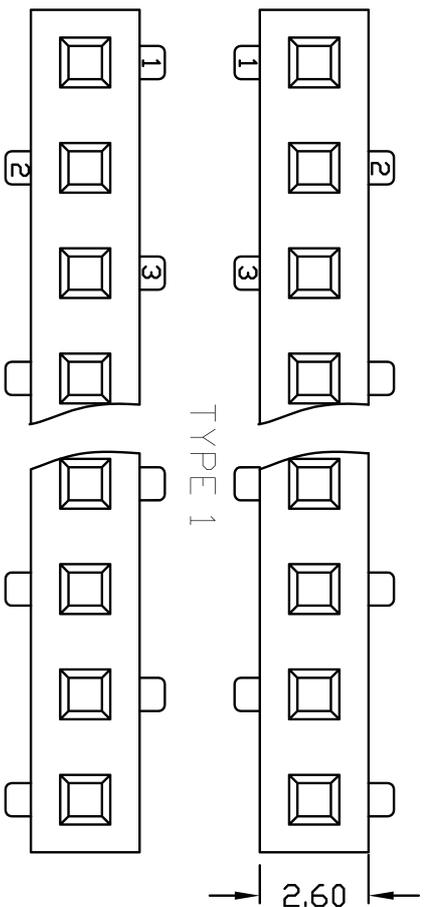

TYPE 2

TYPE 1

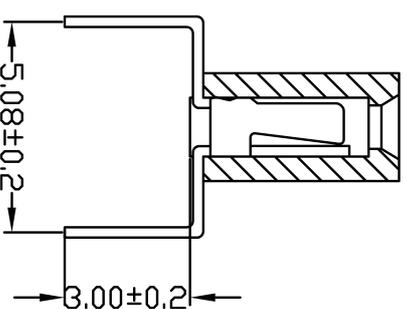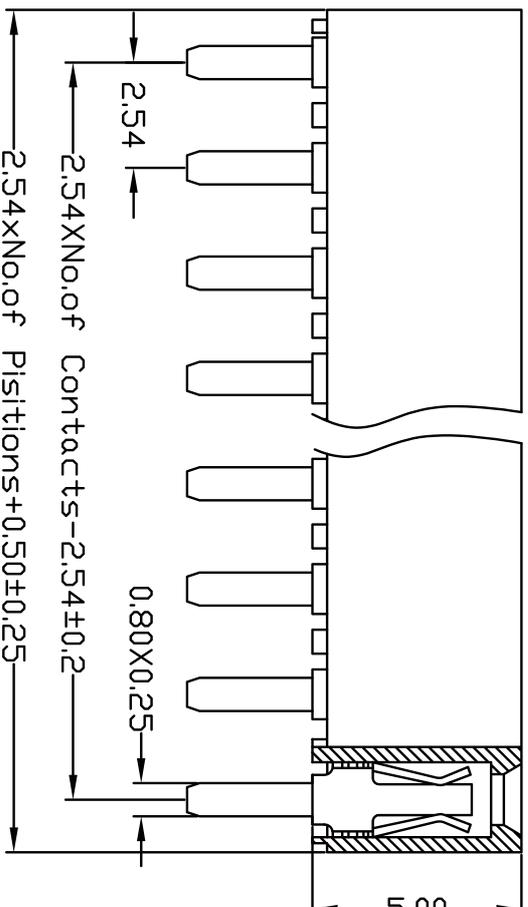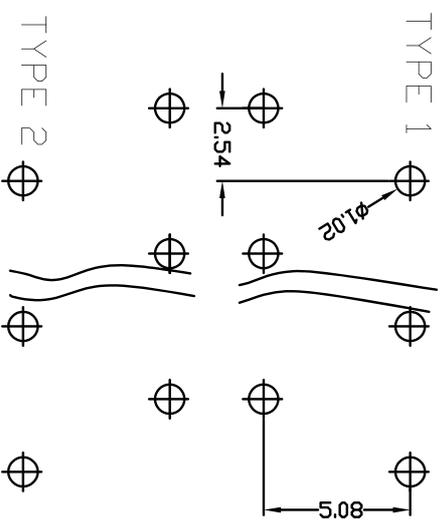

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW

APPROVALS		DATE	
DRAWN	ZHIWEI, CHEN	2015.07.07	
CHECKED		TITLE:	
APPROVALS		PART NO.	
TOLERANCES ARE		30~0.15	±0.30
10~0.10	±0.20	5~0.10	±0.15
~ 5	±0.10	±2°	ANGLE
DRAWING NO.		SCALE: 1:1	PROJ. SHEET 1 OF 1

GEPU 歌普

2.54mm 单排排母 U端 蜈蚣脚