ROHS

www.gepu.tw

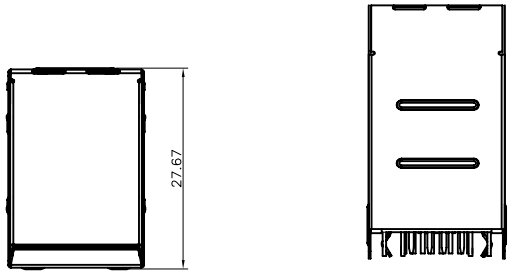



SECTION A-A

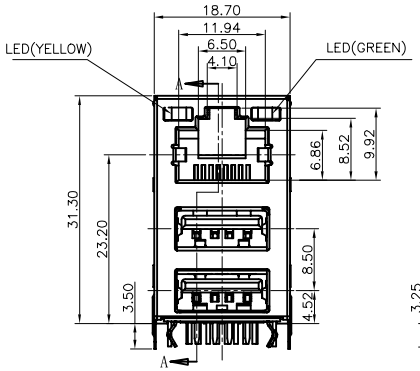

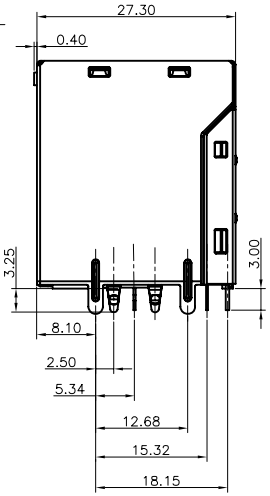

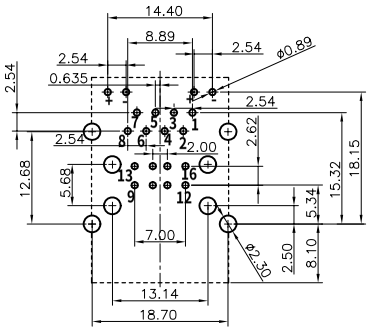

PCB LAYOUT

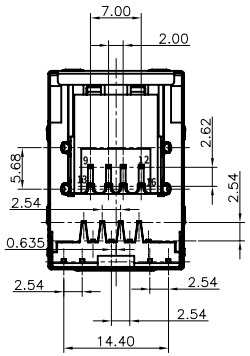

Material
Contact:
RJ Contact :T=0.25mm
Phosphor Bronze Gold FU"
USB Contact:T=0.25mm C2680-H
Gold FU"
Plating Over Nickel
Shielded:
Front shell:SPCC T=0.25mm
Back shell:SPCC T=0.25mm
HOUSING: PBT + 30%G.F., BLACK,
UL94V-0

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE
DRAWN	ZHIWEI.CHEN	2015.07.07
CHECKED		
APPROVALS		

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10; ANGLE ±2°

GEPU 歌普

TITLE: USB2+RJ45 JACK

PART NO. RJ45-6W11-DDYG-AB-88-U2

UNIT: mm | SCALE: 1:1 | PROJ:

DRAWING NO. | SHEET 1 OF 1