


1. 27*1. 27mm (0. 050" *0. 050") PIN HEADER, DUAL ROW, SMT

H=2. 5mm

SPECIFICATIONS

- Current Rating:1AMP
- Contact Resistance:20mΩ Max
- Insulation Resistance:1000MΩ Min
- Withstand Voltage:500V AC/minute
- Operation Temperature:-40℃to+105℃
- Contact:Brass
- plating:Au or Sn Over 30u" Ni
- Insulator:High Temperature Thermoplastic
- UL94V-0 Rated
- Standard:PA6T+30%G.F

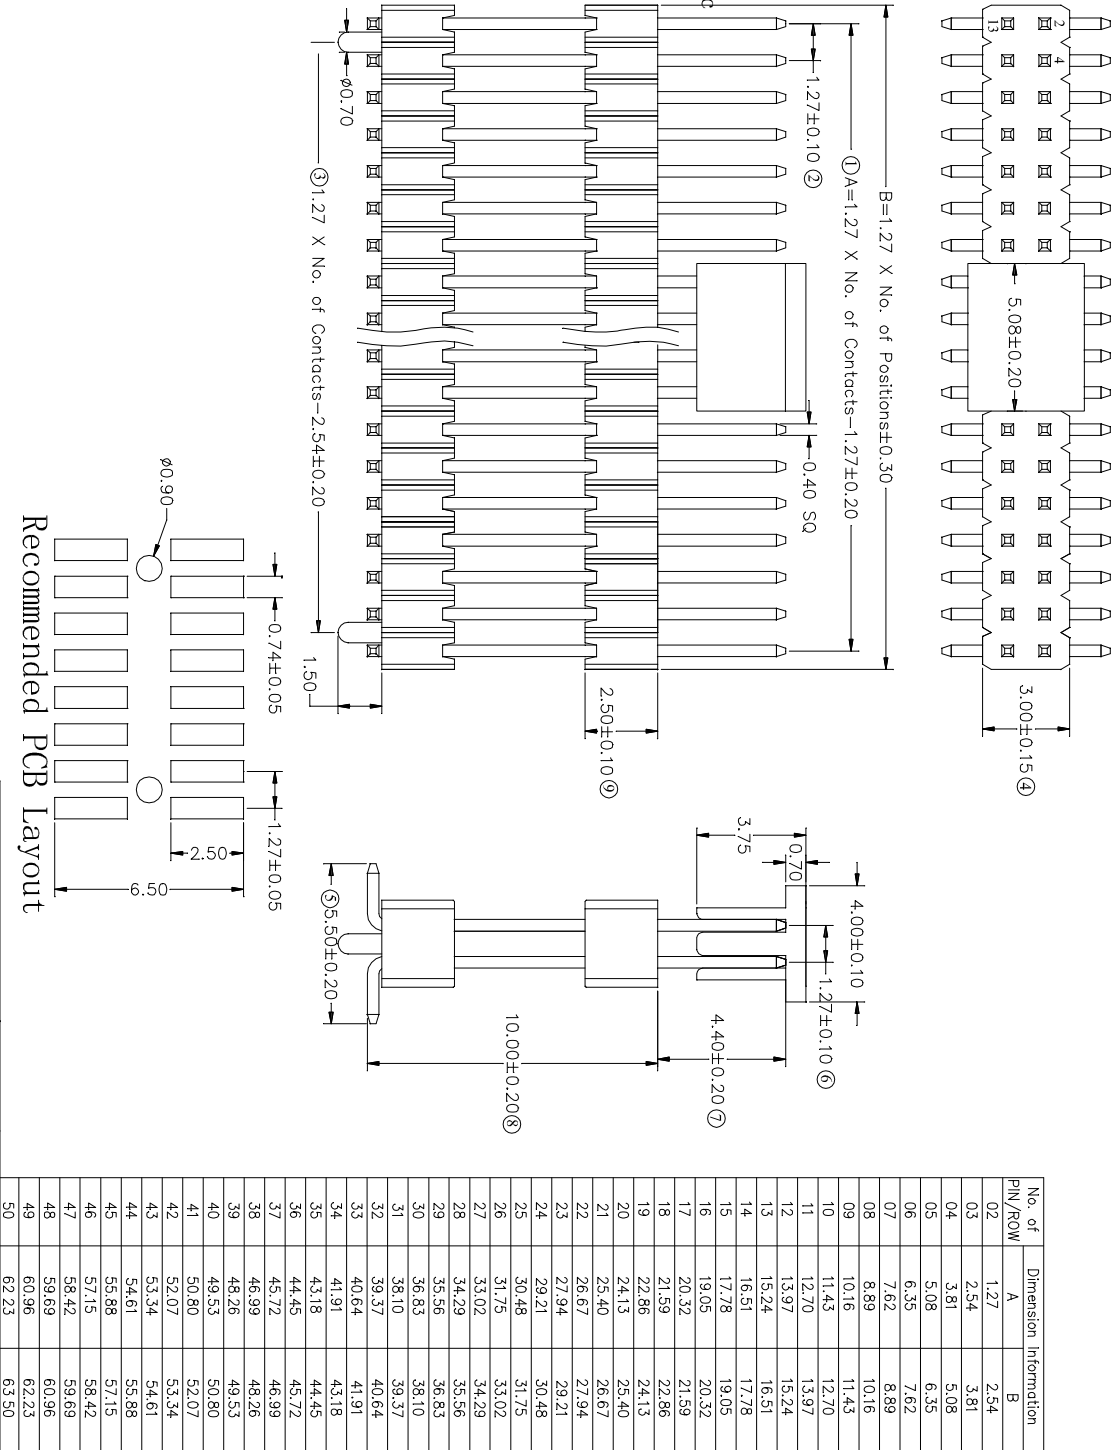

APPROVALS

DATE

DRAWN

ZHIWEI.CHEN

2015.07.07

CHECKED

APPROVALS

TOLERANCES ARE

30~0.15
10~0.20
5~10
~5

±0.30
±0.20
±0.15
±0.10

ANGLE

±2°

PART NO.

GP26-1270WV-S-2XNP-2A

UNIT: mm

SCALE: 1:1

PROJ

DRAWING NO.

SHEET 1 OF 1

ECN NO.

REV.

DATE.

DESCRIPTION.

NEW

CHANGE.

CHECK.

APPRO.