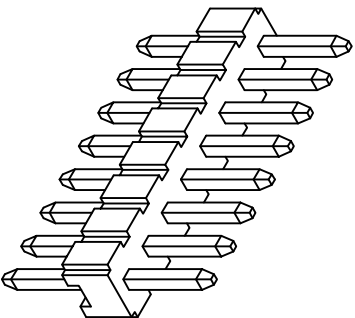


*Optional Dim. available but
MOQ requested*

Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
03P	2.54	3.81	18P	21.59	22.86
04P	3.81	5.08	19P	22.86	24.13
05P	5.08	6.35	20P	24.13	25.40
06P	6.35	7.62	21P	25.40	26.67
07P	7.62	8.89	22P	26.67	27.94
08P	8.89	10.16	23P	27.94	29.21
09P	10.16	11.43	24P	29.21	30.48
10P	11.43	12.70	25P	30.48	31.75
11P	12.70	13.97	26P	31.75	33.02
12P	13.97	15.24	27P	33.02	34.29
13P	15.24	16.51	28P	34.29	35.56
14P	16.51	17.78	29P	35.56	36.83
15P	17.78	19.05	30P	36.83	38.10
16P	19.05	20.32	31P	38.10	39.37
17P	20.32	21.59	32P	39.37	40.64

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 5000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold-flash
Material: Nylon 6T,UL94V-0
Color: Natural(Black)

APPROVALS		DATE		GEPU歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED					
APPROVALS					
TITLE:		1.27mm Cimp Style Connector			
PART NO.		GP26-1270WV-NP		PROJ.	
UNIT: mm		SCALE: 1:1		SHEET 1 OF 1	
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~ 5		±0.30 ±0.20 ±0.15 ±0.10	
ANGLE		±2°		DRAWING NO.	