

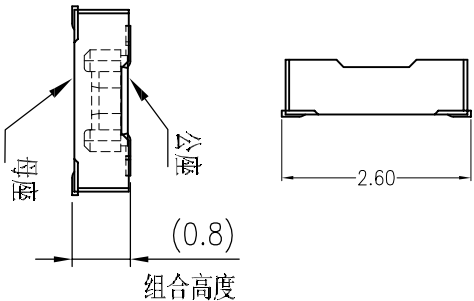
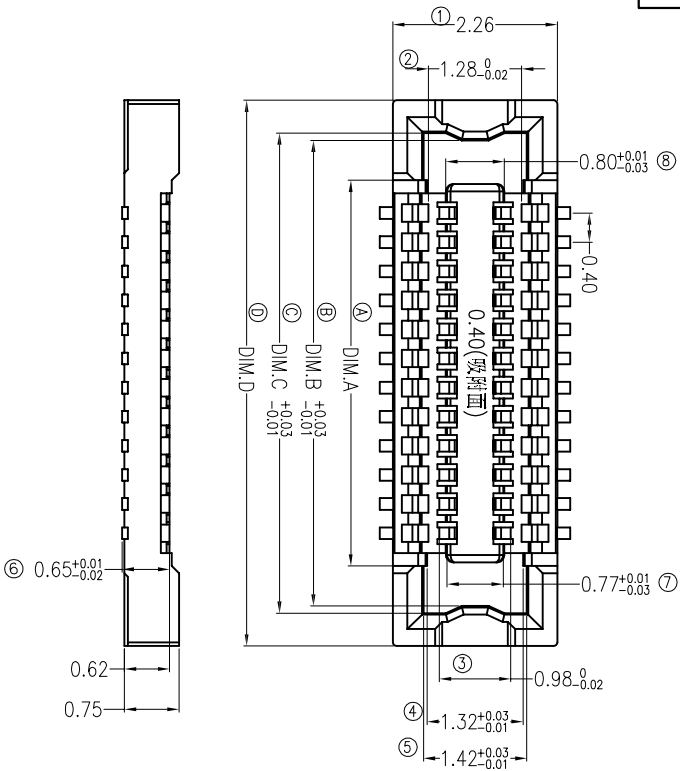


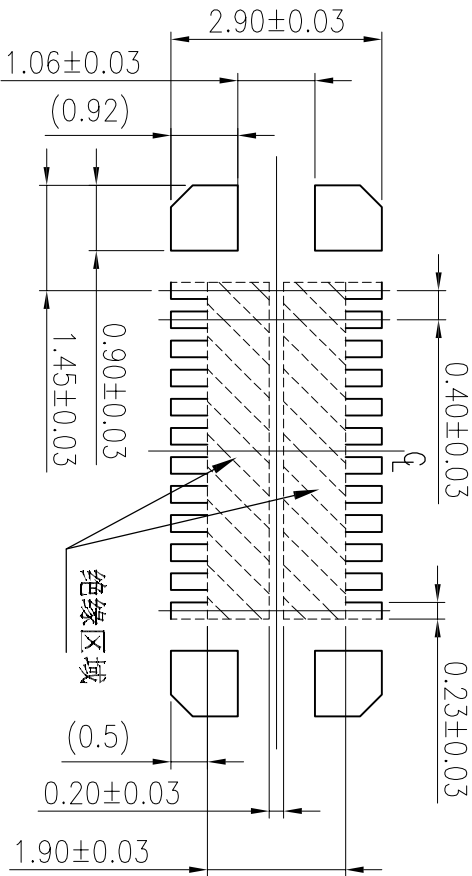

NOTES:
HOUSING: HIGH TEMPERATURE HOUSING UL94V-0
WITHSTANDS IR AND VPR SOLDERING METHODS.
CONTACTS: PHOSPHOR BRONZE.
PLATING: GOLD PLATED.
ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 0.3 AMP.
INSULATOR RESISTANCE: 1000M Ω MIN. AT DC 250V.
CONTACT RESISTANCE: 90M Ω MAX. AT DC 100MA.
OPERATING TEMPERATURE: -55°C ~+85°C .

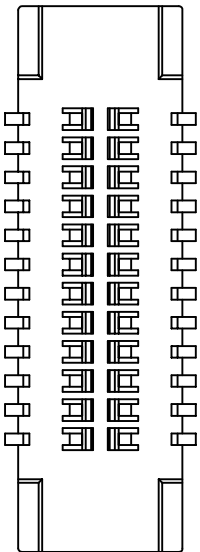

NO. of contacts	Dimensions			
	A.	B.	C.	D.
10	2.50	3.60	3.80	4.70
24	5.30	6.40	6.60	7.50
30	6.50	7.60	7.80	8.70
40	8.50	9.60	9.80	10.70

APPROVALS		DATE	
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED			
APPROVALS		TITLE: 0.4mm BTB H0.8MM	
TOLERANCES ARE		30 $\sim$ 0.1 $\pm$ 10 $\sim$ 0.2 $\pm$ 5 $\sim$ 0.1 $\pm$	ANGLE PART NO. UNIT: mm SCALE: 1:1 PROJ. SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW