
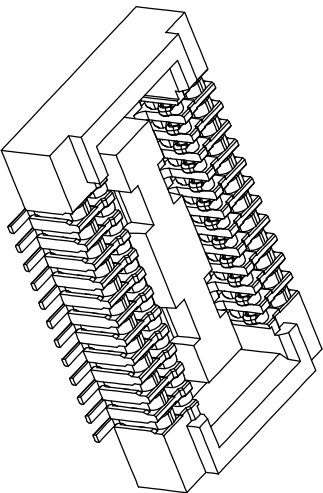


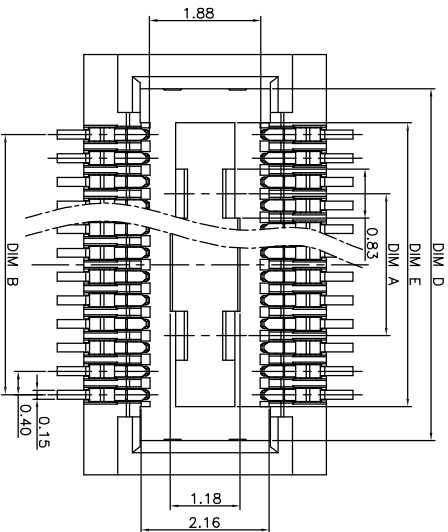

NOTES:

HOUSING: HIGH TEMPERATURE HOUSING U.94V-0

WITHSTANDS IR AND VPR SOLDERING METHODS.

CONTACTS: PHOSPHOR BRONZE.

PLATING: GOLD PLATED.





ELECTRICAL CHARACTERISTICS:

CURRENT RATING:0.3 AMP.

INSULATOR RESISTANCE:1000MΩ MIN. AT DC 250V.

CONTACT RESISTANCE:90MΩ MAX. AT DC 100MA.

OPERATING TEMPERATURE:-55℃ ~+85℃ .

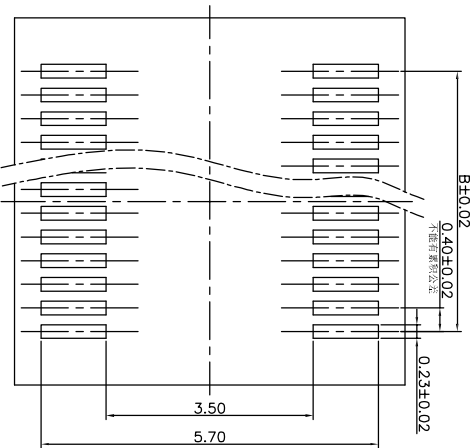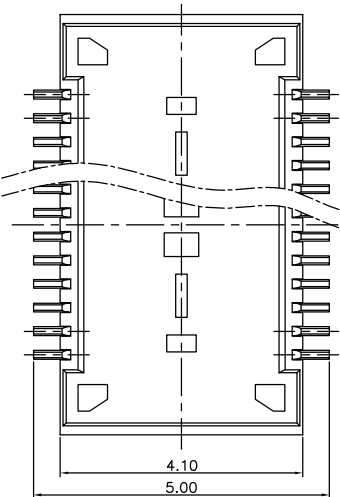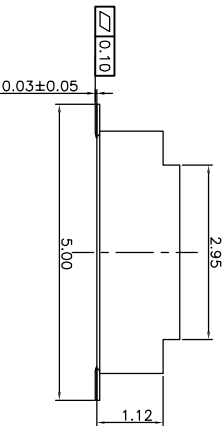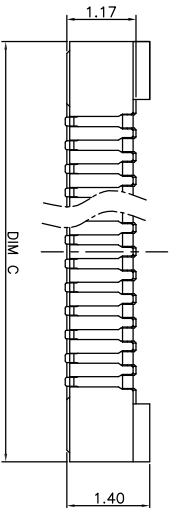

RECOMMENDED PCB LAYOUT

TOP VIEW (TOLRANCE:±0.05)

	A								
ECN NO.	REV.	DATE.	DESCRIPTION.						

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED			TITLE: 0.4mm BTB H1.5mm			
APPROVALS			PART NO.	GP02-8XX-GXXS-B0R	SCALE: 1:1	PROJ.
TOLERANCES ARE			UNIT: mm			SHEET 1 OF 1
30~0.1mm			±0.30	ANGLE		
10~30			±0.20			
5~10			±0.15			
~ 5			±0.10	±2°		
			DRAWING NO.			