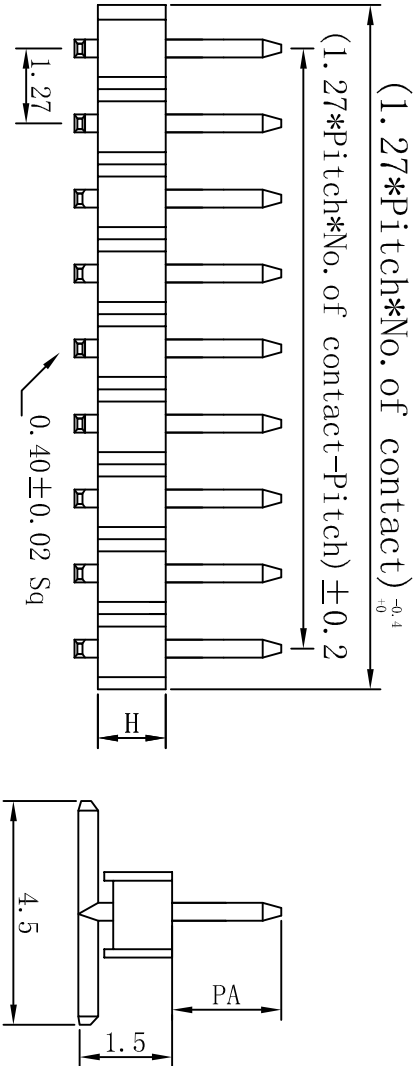
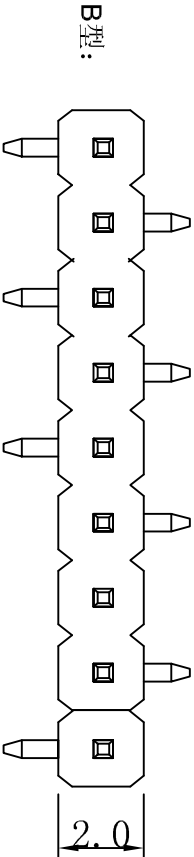
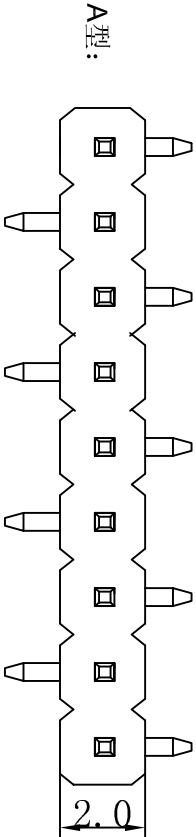


SPECIFICATIONS

Current Rating: 2Amps

Insulator resistance: 5000 Megohms min.

Dielectric Withstanding: AC 500V

Operating Temperature: -40° ~ +105° C

Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)

Contact Material: Brass

Insulator Material: NYLON-6T

UNSPECIFIED TOLERANCE: ±0.20

Plastic Base

Type	
H	1.0
PA	2.0
PC	4.5-5.0

APPROVALS		DATE		GEPU 歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED				TITLE:	
APPROVALS				PART NO.	
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm
				SCALE: 1:1	PROJ.
				DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			