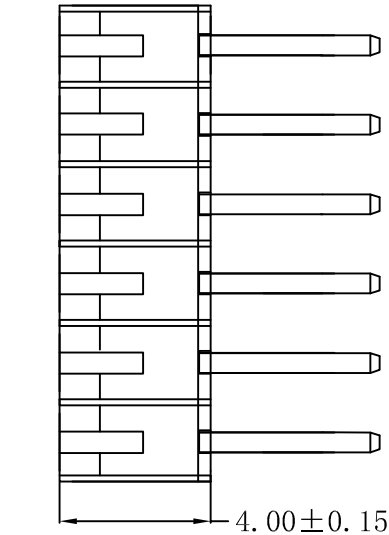
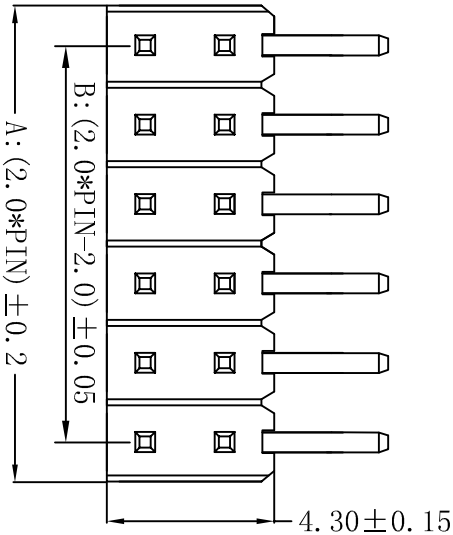


PCB LAYOUT

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE	CHECK.	APPRO.
	A		NEW			

备注(Remark)

1.材料(MATERIAL)

胶芯:PA6T/PBT+30%G.F UL94V-0,颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0,Color: Black 黄铜,

端子:镍底30u"MIN,表面镀金1u"MIN

Contact: Brass,0.8u"MIN GOLD PLATING OVERALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性(characteristics):

额定电流: 2AMP

Raring Current: 2AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围:-40°C to+105°C

Temperature Range:-40°C to+105°C

Plastic Base

Type	
H	4.0
PA	2.8
PB	0
PC	2.8

APPROVALS

DRAWN ZHIWEI.CHEN 2015.07.07

CHECKED

TOLERANCES ARE 30~0.15 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10

ANGLE ±2°

UNIT: mm

SCALE: 1:1

PROJ. SHEET 1 OF 1

TITLE: 2.0mm 成型弯针

PART NO. GP26-2020WR-CS-2xNP

GEPU 歌普