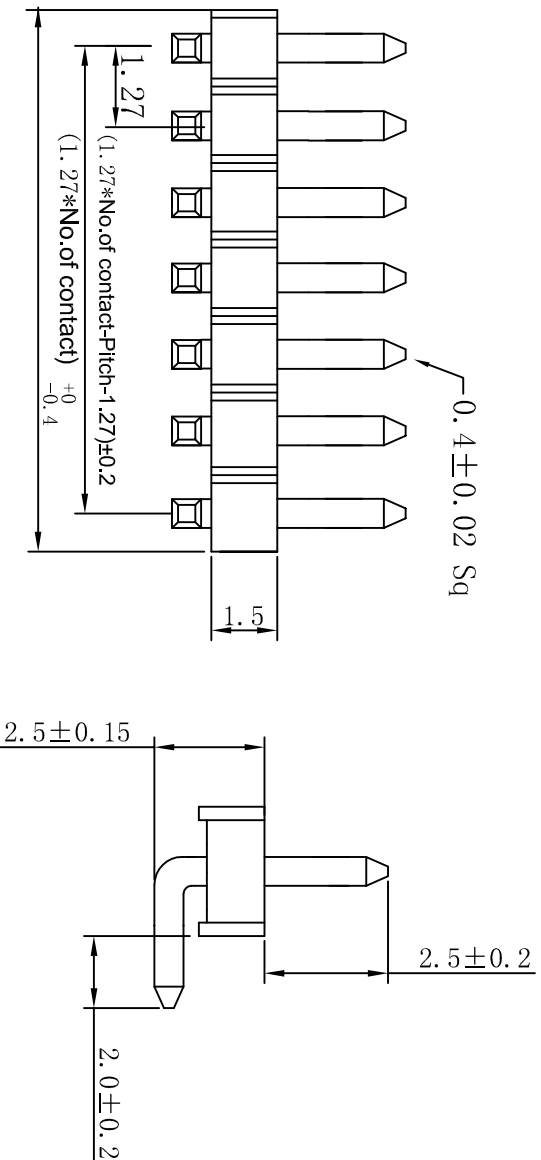
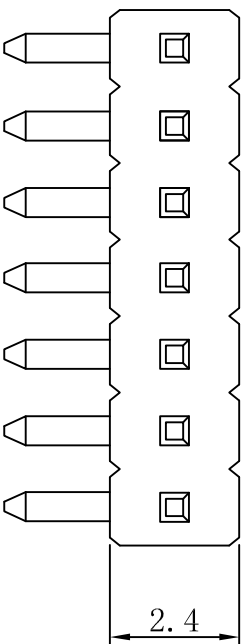


SPECIFICATIONS

Current Rating:	1Amps
Insulator Resistance:	500Megohms min.
Dielectric Withstanding:	AC 500v
Operating Temperature:	-40° ~ +105° c
Contact Material:	Brass
Insulator Material:	NY-6T
PLTAINING:	GOLD FLASH

UNSPECIFIED TOLERANCE: ± 0.20

Dimensions List

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	1.27	0	1*21	26.67	25.40
1*2	2.54	1.27	1*22	27.94	26.67
1*3	3.81	2.54	1*23	29.21	27.94
1*4	5.08	3.81	1*24	30.48	29.21
1*5	6.35	5.08	1*25	31.75	30.48
1*6	7.62	6.35	1*26	33.02	31.75
1*7	8.89	7.62	1*27	34.29	33.02
1*8	10.16	8.89	1*28	35.56	34.29
1*9	11.43	10.16	1*29	36.83	35.56
1*10	12.70	11.43	1*30	38.10	36.83
1*11	13.97	12.70	1*31	39.37	38.10
1*12	15.24	13.97	1*32	40.64	39.37
1*13	16.51	15.24	1*33	41.91	40.64
1*14	17.78	16.51	1*34	43.18	41.91
1*15	19.05	17.78	1*35	44.45	43.18
1*16	20.32	19.05	1*36	45.72	44.45
1*17	21.59	20.32	1*37	46.99	45.72
1*18	22.86	21.59	1*38	48.26	46.99
1*19	24.13	22.86	1*39	49.53	48.26
1*20	25.40	24.13	1*40	50.80	49.53

[illegible]