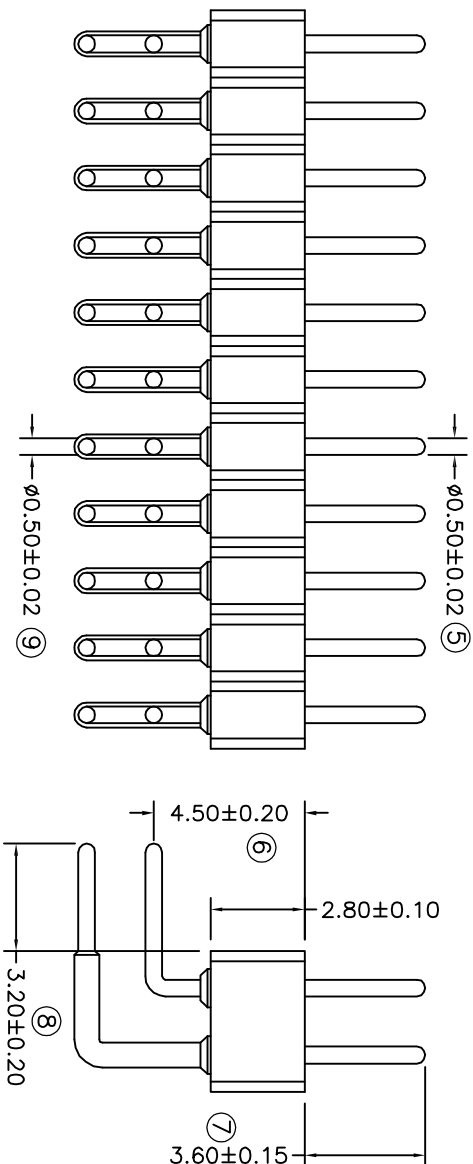
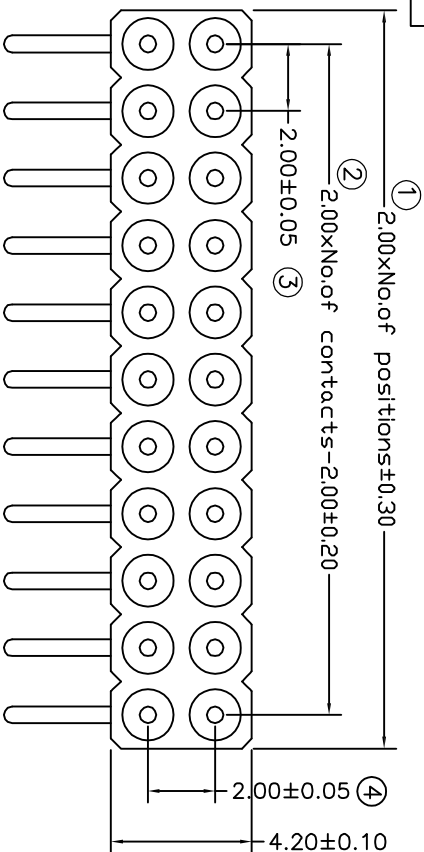


P.C.B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: 2μm /80μ"Ni,5μm /200μ"Sn

Gold Plated: 2μm /80μ"Ni,0.8μ" gold

Insuiator: PPS UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤4mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Dielectric Withstanding Voltage: 1000V AV Min

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life: min 500 cycle

Operating temperature: -40℃ to+105℃

Soldering temperature: +255℃

Critical Dimensions(*)

												APPROVALS		DATE		GEPU歌普 TITLE: 2.00mm 90°															
												DRAWN		ZHIWEI.CHEN						2015.07.07											
												CHECKED																			
												APPROVALS								PART NO.											
																				GP22-2520WR-2xNP-1610A											
																		30~0.15		±0.30		ANGLE		UNIT: mm		SCALE: 1:1		PROJ. 		SHEET 1 of 1	
																				10~30		±0.20									
																				5~10		±0.15		±2°							
																				~ 5		±0.10									