
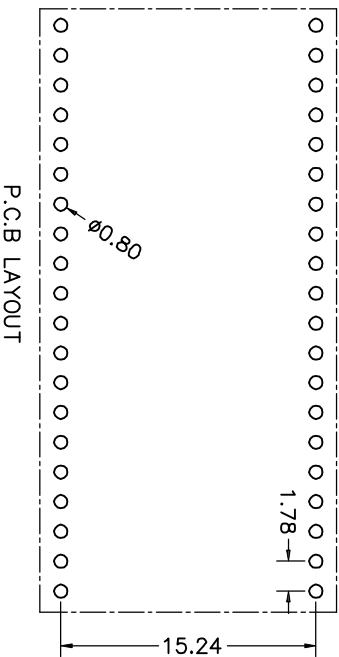
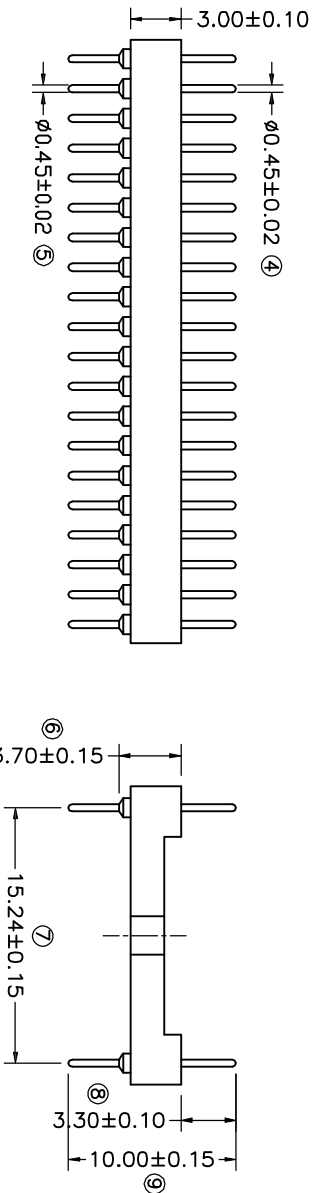


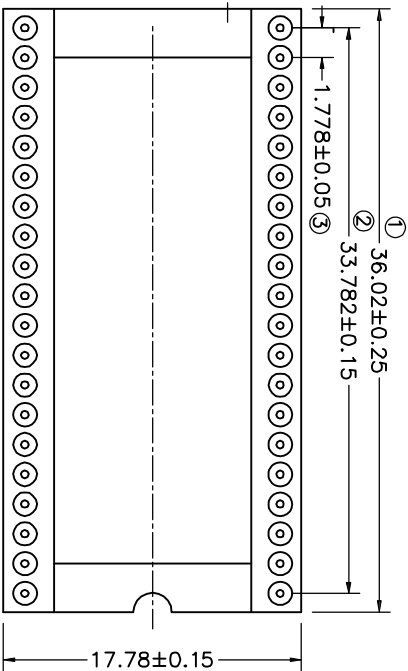

Technical Data
Material: Pin(outer sleeve):Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin Plated: 2μm/80μm"Ni,5μm/200 μ"Sn
Gold Plated: 2μm"/80 μm"Ni,0.8 μ" gold
Insulator: PPS UL94V-0

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operating voltage: 60VAC/DC

Mechanical:
Operating temperature: -40°C to+105°C
Soldering temperature: +255°C

				APPROVALS		DATE		GEPU歌普					
				DRAWN		ZHIWEI.CHEN		2015.07.07					
				CHECKED						TITLE: 1.778MM IC 圓孔插針			
				APPROVALS						PART NO. GP28-1778WV-2xNP-1000A			
				A		NEW							
</													