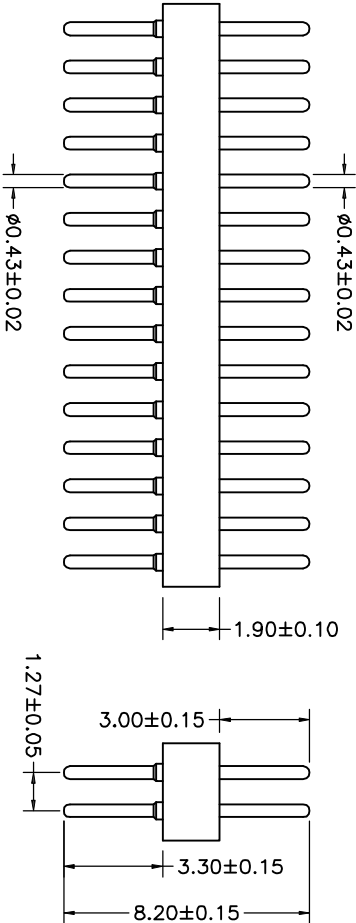
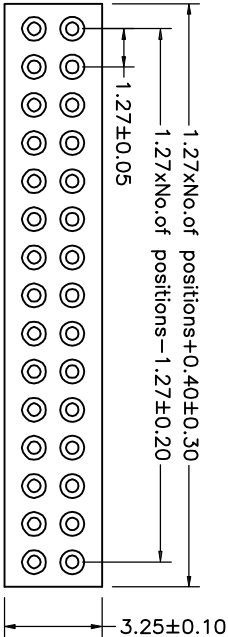


Technical Data
Material:
Pin(outer sleeve): Brass, machined CuZn38Pb2
Plating(outer sleeve):

Tin Plated: 2μm/80μm "Ni, 5μm/200 μ" Sn
Gold Plated: 2μm"/80 μm "Ni, 0.8 μ" gold
Insulator: PPS UL94V-0
Mating pin : φ0.43

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operating voltage: 60VAC/DC

Mechanical:
Mechanical life: min 500 cycle
Operating temperature: -40°C to +105°C
Soldering temperature: +255°C

APPROVALS					DATE		GEPU 歌普		
DRAWN		ZHIWEI.CHEN			2015.07.07				
CHECKED					TITLE:		Double socket connector 1.27mmxH1.90mm L=8.20mm		
APPROVALS					PART NO.		GP22-1273WV-2xNP-0820A		