
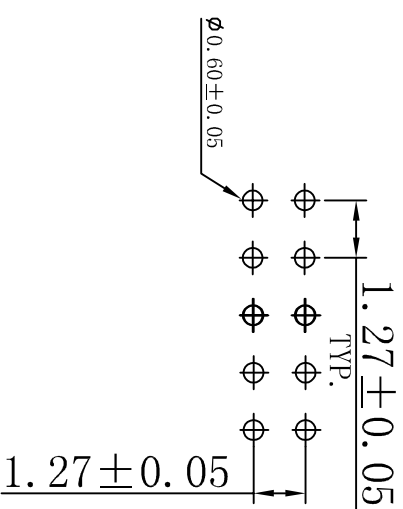

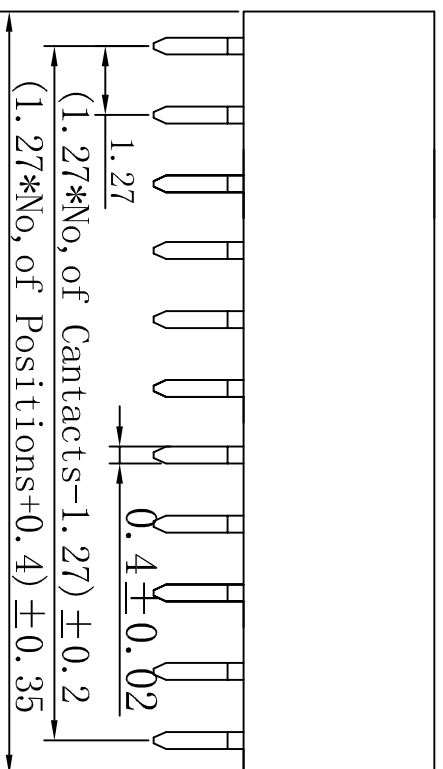


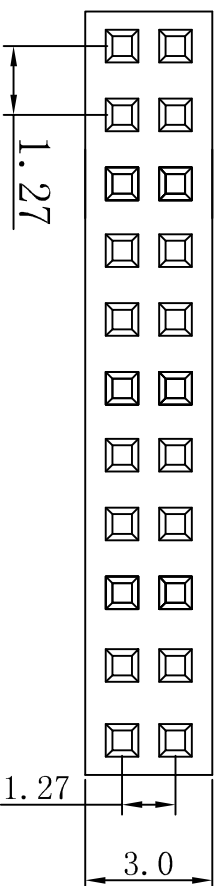

SPECIFICATIONS

Current Rating: 1mps

Insulator resistance: 500 Megchms min.

Dielectric Withstanding: AC 300V

Operating Temperature: -40° to $+105^{\circ}$ C

Contact Material: Phosphor Bronzes

Insulator Material: NYLON-6T

Plating: Gold Flash

Unspecified tolerance: ± 0.20

		APPROVALS		DATE	歌普 PHI. 27*4.3 180° 排母			
		DRAWN	ZHIWEI.CHEN	2015.07.07				
		CHECKED						
		APPROVALS						
					PART NO.	GP25-1271WV-2XNP		
					TITLE:			
					TOLERANCES ARE	30~0.01 10~.30 5~.10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	DRAWING NO.	SHEET 1 OF