




TOP VIEW




LEFT SIDE VIEW

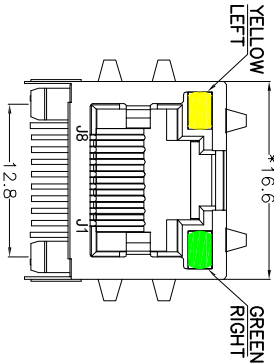


FRONT VIEW




RIGHT SIDE VIEW




BACK VIEW



BOTTOM VIEW




RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

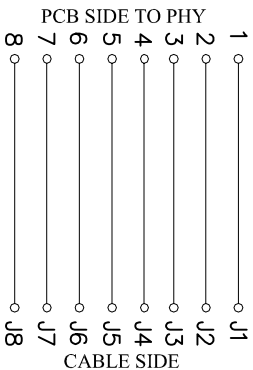

LED Specification

Standard LED Color	LED Wavelength	Forward(I)	Forward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V



MATERIAL:
HOUSING: PA46,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE 0=0.46MM , G/FU" GOLD PLATING.
SHIELD: C2680,T=0.20MM,20~50U" MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH *18.1

ELECTRICAL:
VOLTAGE:125 VOLTS AC.
CURRENT RATING : 1.5AMP
DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ OR 60HZ,1 MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. AFTER
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED			TITLE:			
APPROVALS			PART NO.	RJ45-6W11-DDY0-AA-88-B1	SCALE: 1:1	PROJ.
TOLERANCES ARE	30~0.1mm	±0.30	ANGLE		UNIT: mm	
	10~30	±0.20				
	5~10	±0.15	±2°			
	~ 5	±0.10		DRAWING NO.		SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			