

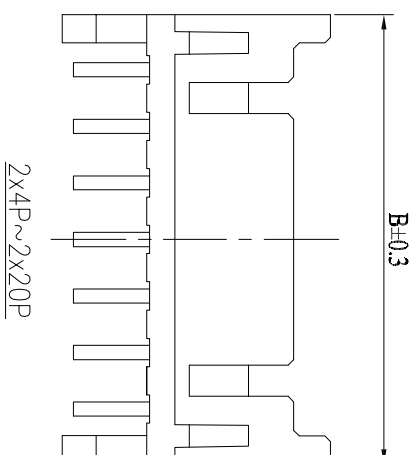
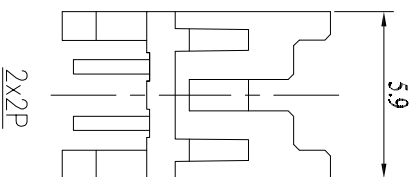
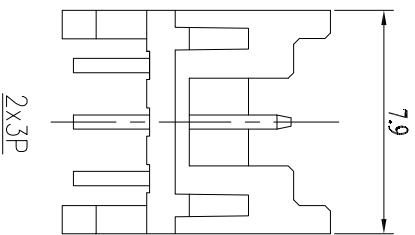

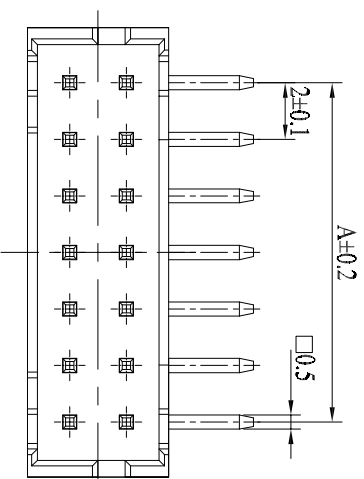



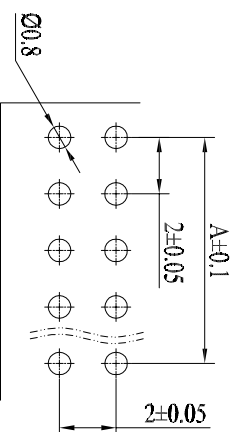

Poles	DM/A	DM/B
2x2P	2.0	5.9
2x3P	4.0	7.9
2x4P	6.0	9.9
2x5P	8.0	11.9
2x6P	10.0	13.9
2x7P	12.0	15.9
2x8P	14.0	17.9
2x9P	16.0	19.9
2x10P	18.0	21.9
2x11P	20.0	23.9
2x12P	22.0	25.9
2x13P	24.0	27.9
2x14P	26.0	29.9
2x15P	28.0	31.9
2x16P	30.0	33.9
2x17P	32.0	35.9
2x18P	34.0	37.9
2x19P	36.0	39.9
2x20P	38.0	41.9

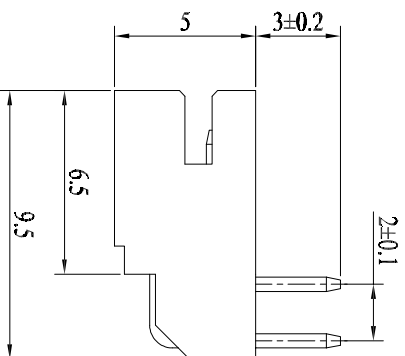

■ 技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 250V AC/DC
- ◆ Voltage rating: 250V AC/DC
- ◆ 额定电流: 2.0A AC/DC #24
- ◆ Current rating: 2.0A AC/DC #24
- ◆ 耐压值: 800V AC/minute
- ◆ Withstand voltage: 800V AC/minute
- ◆ 绝缘电阻: 1000M Ω MIN
- ◆ Insulation resistance: 1000M Ω MIN
- ◆ 接触电阻: 0.01 Ω MAX
- ◆ Contact resistance: 0.01 Ω MAX
- ◆ 工作温度: -25°C ~ +85°C
- ◆ Working Temperature: -25°C ~ +85°C
- ◆ 间距: 2.0 mm
- ◆ Pitch: 2.0 mm

材料 (MATERIAL)

- ◆ 基座: 尼龙46 UL94V-0
Wafer: PA46 UL94V-0
- ◆ 插针: 黄铜
Pin: Brass

[illegible]