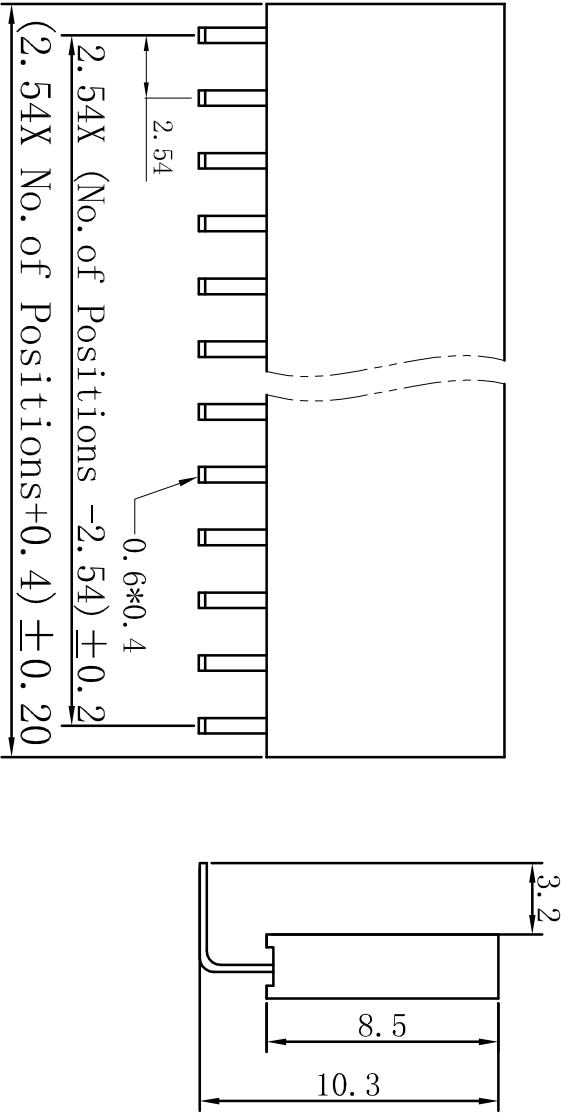
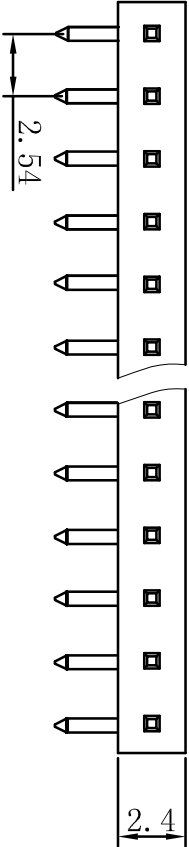


PCB LAYOUT

SPECIFICATIONS

Current Rating: 3Amps

Insulator Resistance: 5000Megohms min.

Dielectric Withstanding: AC 500v

Operating Temperature: -40°C ~+105°C

Contact Material: Brass

Insulator Material: PA6T

Finish: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

Dimen Sions List

Contacts	Dimensions		Contacts	Dimensions	
	A	B		A	B
1	2.54	0	21	53.34	50.80
2	5.08	2.54	22	55.88	53.34
3	7.62	5.08	23	58.42	55.88
4	10.16	7.62	24	60.96	58.42
5	12.70	10.16	25	63.50	60.96
6	15.24	12.70	26	66.04	63.50
7	17.78	15.24	27	68.58	66.04
8	20.32	17.78	28	71.12	68.58
9	22.86	20.32	29	73.66	71.12
10	25.40	22.86	30	76.20	73.66
11	27.94	25.40	31	78.74	76.20
12	30.48	27.94	32	81.28	78.74
13	33.02	30.48	33	83.82	81.28
14	35.56	33.02	34	86.36	83.82
15	38.10	35.56	35	88.90	86.36
16	40.64	38.10	36	91.44	88.90
17	43.18	40.64	37	93.98	91.44
18	45.72	43.18	38	96.52	93.98
19	48.26	45.72	39	99.06	96.52
20	50.80	48.26	40	101.6	99.06

APPROVALS		DATE		TITLE:		PH2.54MM 90°	
DRAWN	ZHIWEI.CHEN	2015.07.07		PART NO.		GP25-2521WR-NP	
CHECKED				UNIT: mm		SCALE: 1:1	
APPROVALS				DRAWING NO.		SHEET 1 OF 1	
TOLERANCES ARE				30~0.15 10~0.20 5~0.10 ~5			
				±0.30 ±0.20 ±0.15 ±0.10			
				ANGLE ±2°			