

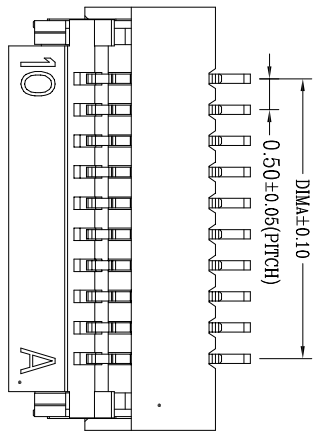
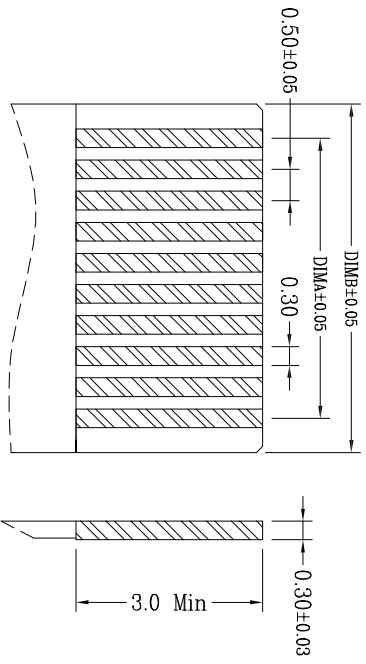
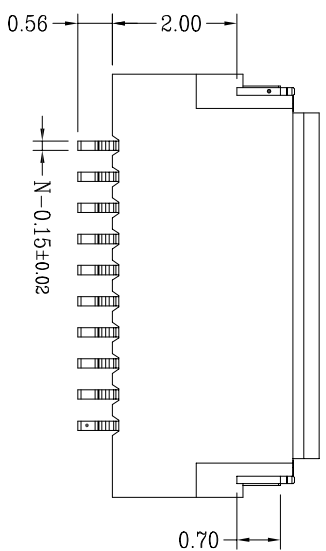
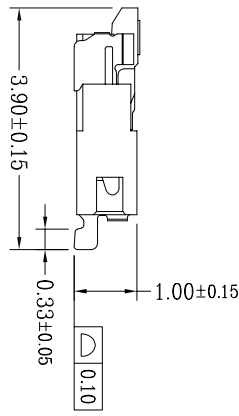
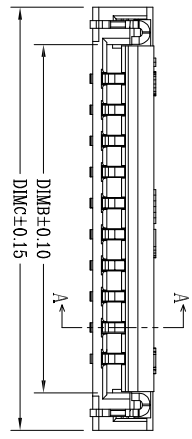


SECTION A-A

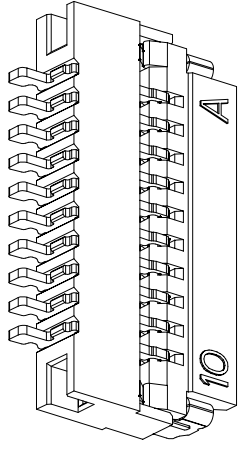

适用扁平线

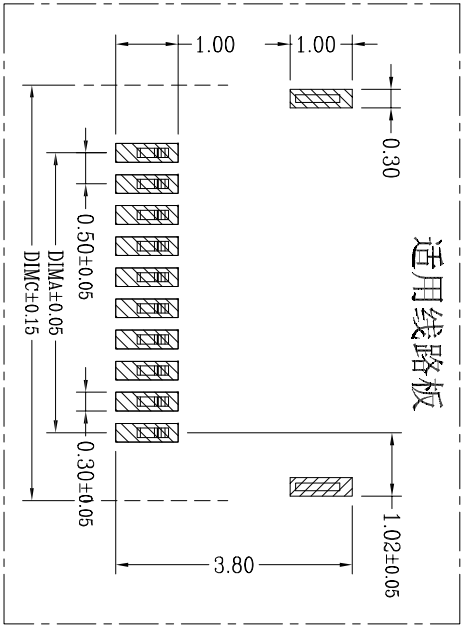

适用线路板

| CKT | DMI A | DMI B | DMI C |
|-----|-------|-------|-------|
| 4   | 1.50  | 2.60  | 3.80  |
| 6   | 2.50  | 3.60  | 4.80  |
| 8   | 3.50  | 4.60  | 5.80  |
| 10  | 4.50  | 5.60  | 6.80  |
| 12  | 5.50  | 6.60  | 7.80  |
| 30  | 14.50 | 15.60 | 16.80 |
| 40  | 19.50 | 20.60 | 21.80 |

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
  2. 温度范围: -30° C~85° C.
  3. 额定电压: 50V, AC/DC(等效).
  4. 接触电阻: ≤30mΩ.
  5. 绝缘电阻: ≥500MΩ

| APPROVALS      |             | DATE                        |                    |
|----------------|-------------|-----------------------------|--------------------|
| DRAWN          | ZHIWEI.CHEN | 2015.07.07                  |                    |
| CHECKED        |             | TITLE: 0.5 Pitch连接器(式(1.0)) |                    |
| APPROVALS      |             | PART NO.                    | GP05-WSHA-NP-A-X01 |
| TOLERANCES ARE |             | UNIT: mm                    | SCALE: 1:1         |
| 30~0.10        | ±0.30       | ANGLE                       | PROJ               |
| 10~30          | ±0.20       |                             |                    |
| 5~10           | ±0.15       |                             |                    |
| ~5             | ±0.10       | DRAWING NO.                 | SHEET 1 OF 1       |
| ECN NO.        | REV.        | DATE.                       | DESCRIPTION.       |
|                | A           |                             | NEW                |