

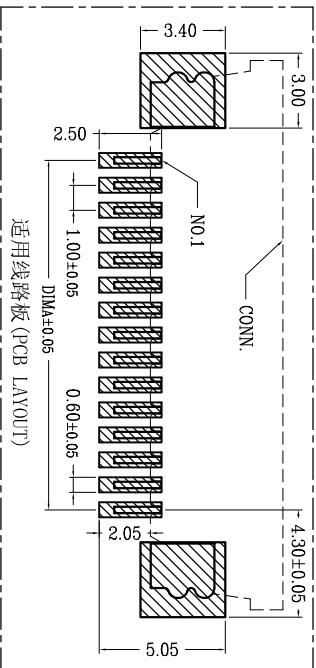
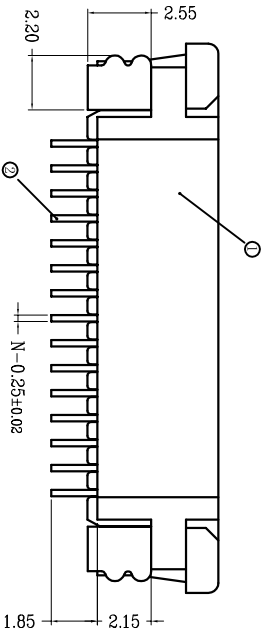



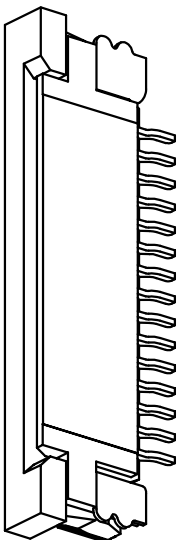


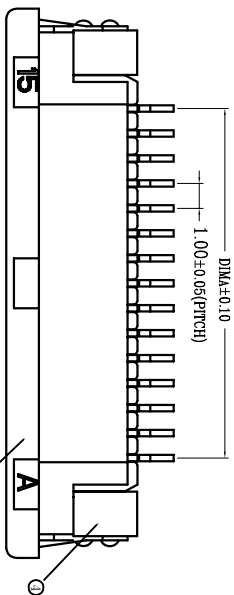

序号	品名	材质
①	1.0胶芯 (12.5)	LCP UL94V-0 本色 Natural
②	1.0下接端子 (12.5)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	1.0防式后盖 (12.5)	LCP UL94V-0 黑色 Black
④	1.0防式焊片 (12.5)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

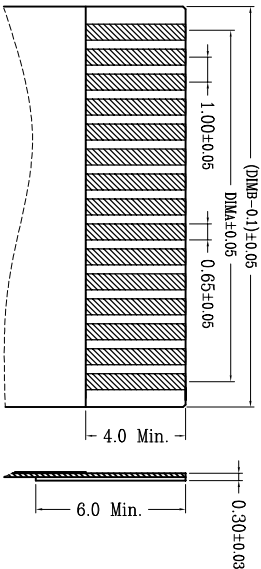

技术指标 (Technical Index) :

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)

2. 温度范围 (Temperature range) : -25° C~+85° C.
3. 额定电压 (Rated voltage) : 50V, AC/DC (=等效).
4. 接触电阻 (Contact resistance) : ≤0.03Ω.
5. 绝缘电阻 (Insulation resistance) : ≥500MΩ.

CKT	DIM A	DIM B	DIM C
4	3.00	5.03	11.10
5	4.00	6.03	12.10
6	5.00	7.03	13.10
7	6.00	8.03	14.10
8	7.00	9.03	15.10
9	8.00	10.03	16.10
10	9.00	11.03	17.10
11	10.00	12.03	18.10
12	11.00	13.03	19.10
13	12.00	14.03	20.10
14	13.00	15.03	21.10
15	14.00	16.03	22.10
16	15.00	17.03	23.10
17	16.00	18.03	24.10
18	17.00	19.03	25.10
19	18.00	20.03	26.10
20	19.00	21.03	27.10
21	20.00	22.03	28.10
22	21.00	23.03	29.10
23	22.00	24.03	30.10
24	23.00	25.03	31.10
25	24.00	26.03	32.10
26	25.00	27.03	33.10
27	26.00	28.03	34.10
28	27.00	29.03	35.10
29	28.00	30.03	36.10
30	29.00	31.03	37.10
31	30.00	32.03	38.10
32	31.00	33.03	39.10
33	32.00	34.03	40.10
34	33.00	35.03	41.10
35	34.00	36.03	42.10
36	35.00	37.03	43.10
37	36.00	38.03	44.10
38	37.00	39.03	45.10
39	38.00	40.03	46.10
40	39.00	41.03	47.10

APPROVALS		DATE	
DRAWN	ZHIMEL CHEN	2015.07.07	
CHECKED		TITLE:	
APPROVALS		PART NO.	
TOLERANCES ARE		SCALE: 1:1	
30~0.15	±0.30	ANGLE	PROT
10~30	±0.20	UNIT: mm	SHEET 1 OF 1
5~10	±0.15	DRAWING NO.	
~5	±0.10		
ECN NO.			
REV.			
DATE.			
DESCRIPTION.			
NEW			
CHANGE.			
CHECK.			
APPRO.			

GEPU 歌普