




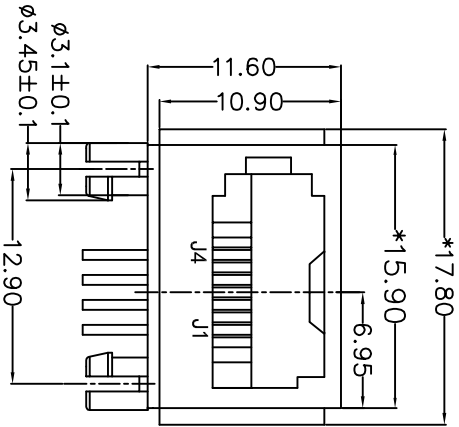


FRONT VIEW

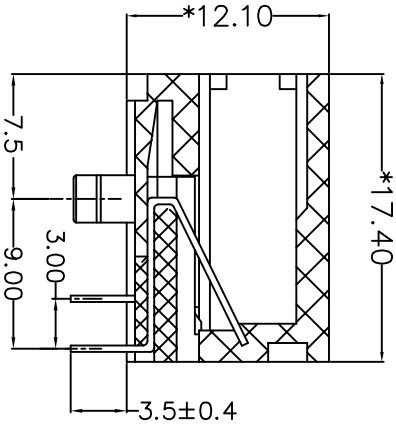

RIGHT SIDE VIEW

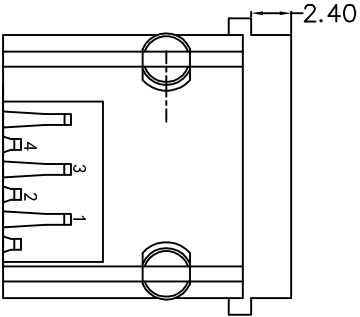

BOTTOM VIEW




RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:
HOUSING: PBT, UL94V-0, WHITE.
TERMINAL: PHOSPHOR BRONZE T=0.40MM, G/FU" GOLD PLATING.

MACHANICAL:
DURABILITY: 600 CYCLES MIN.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃~+85℃.
STORAGE TEMPERATURE: -10℃~+40℃.
ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1 MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL.
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

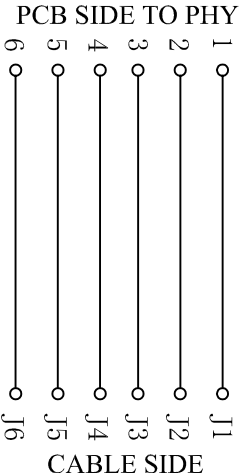

					APPROVALS		DATE		GEPU歌普											
					DRAWN		ZHIWEI.CHEN		2015.07.07											
					CHECKED						TITLE: UK JACK-DJ 6P4C									
					APPROVALS						PART NO. RJ45-6W11-DDN-BB-64-W1									
					TOLERANCES ARE		30~0.15 10~0.30 5~10 ~ 5		±0.30 ±0.20 ±0.15 ±0.10		ANGLE ±2°		UNIT: mm		SCALE: 1:1		PROJ. 		SHEET 1 OF 1	
					A						NEW									
					REV.		DATE.		CHANGE.		CHECK.		APPRO.							
					ECN NO.				DESCRIPTION.											