

技术参数 SPECIFICATIONS

适用线规: AWG#28~#22

Applicable Wire: AWG#28~#22

额定电压: 250V DC/AC(rms)

Rated voltage: 250V DC/AC(rms)

额定电流: 3A (AWG #22)

Rated Current: 3A (AWG #22)

耐压值: 800V AC/minute

Withstand voltage: 800V AC/min.

工作温度: -25℃ ~ +85℃

Working Temp : -25℃ ~ +85℃

绝缘电阻: ≥1000 MΩ

Insulation resistance: ≥1000 MΩ

接触电阻: ≤10 mΩ

Contact resistance: ≤10 mΩ

材料 MATERIAL

绝缘体: 尼龙9T, UL94-V0


Insulator: PA9T, UL94-V0

接触针: 黄铜


Contact PIN: Brass

焊片: 黄铜


Solder tab: Brass




2P

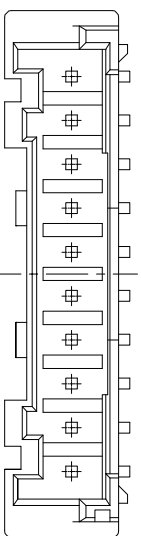


10P~12P




7~12P 有缺口
2~6P 没有缺口





3P





4P



5P~9P

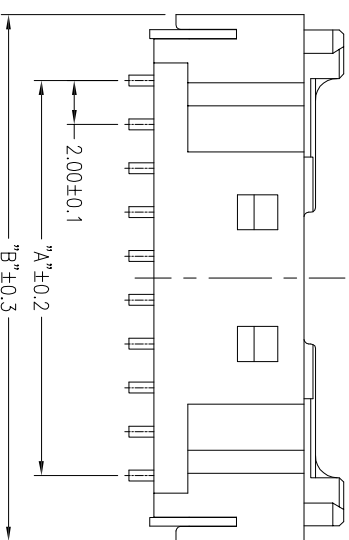

Assembly Layout

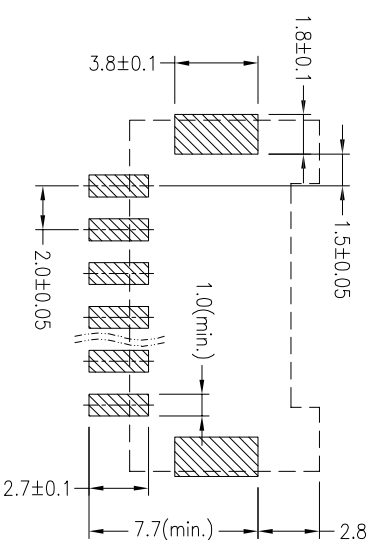

Poles	DIM.A	DIM.B	Poles	DIM.A	DIM.B
2P	2.0	8.0	10P	18.0	24.0
3P	4.0	10.0	11P	20.0	26.0
4P	6.0	12.0	12P	22.0	28.0
5P	8.0	14.0	—	—	—
6P	10.0	16.0	—	—	—
7P	12.0	18.0	—	—	—
8P	14.0	20.0	—	—	—
9P	16.0	22.0	—	—	—

P.C.B LAYOUT

				APPROVALS		DATE		GEPU歌普					
				DRAWN		ZHIWEI.CHEN		2015.07.07					
				CHECKED						TITLE: 2.00mm Crimp Style Connector			
				APPROVALS						PART NO. GP01-2000WRS-NP			
										30~0.15° ±0.30° 10~30° ±0.20° 5~10° ±0.15° ~ 5° ±0.10°			
				NEW						ANGLE			
				A						UNIT: mm			
				ECN NO.		REV.		DATE.		SCALE: 1:1			
				DESCRIPTION.		CHANGE.		CHECK.		PROJ.			
										SHEET 1 OF 1			