
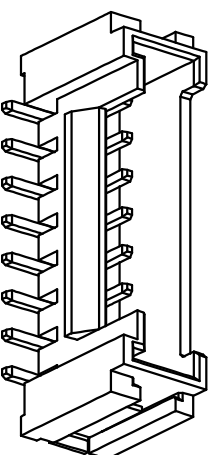
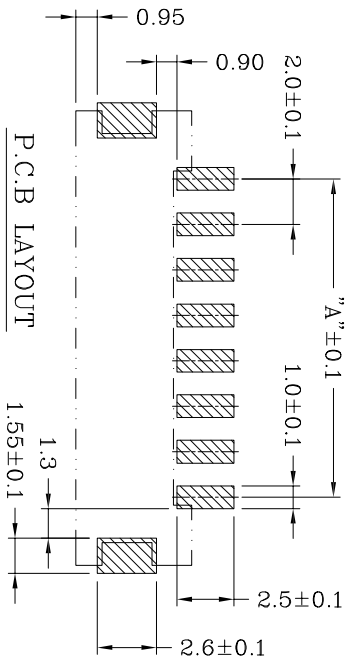
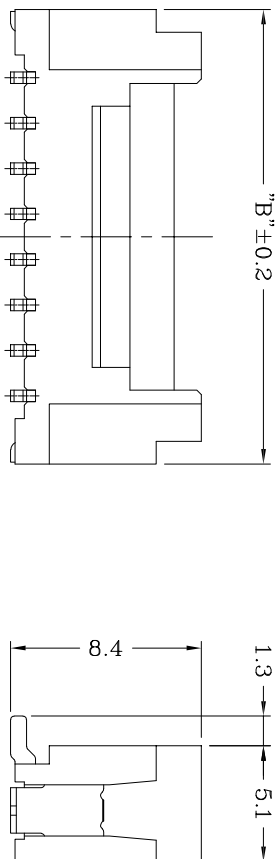


Poles	DIM.A	DIM.B
2	2.0	8.0
3	4.0	10.0
4	6.0	12.0
5	8.0	14.0
6	10.0	16.0
7	12.0	18.0
8	14.0	20.0
9	16.0	22.0
10	18.0	24.0
11	20.0	26.0
12	22.0	28.0
13	24.0	30.0
14	26.0	32.0
15	28.0	34.0
16	30.0	36.0

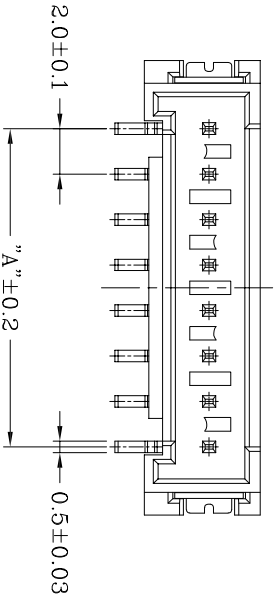

技术参数 SPECIFICATIONS

适用线规: AWG#30~#22
Applicable Wire: AWG#30~#22
额定电压: 125V DC,AC(rms)
Rated voltage: 125V DC,AC(rms)
额定电流: 2A
Rated Current: 2A
耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/min.
工作温度: -25°C ~ +85°C
Working Temp : -25°C ~ +85°C
绝缘电阻: ≥1000 MΩ
Insulation resistance: ≥1000 MΩ
接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ
材料 MATERIAL
绝缘体: 尼龙9T, UL94-V0
Insulator: PA9T, UL94-V0
接触针: 黄铜
Contact PIN: Brass
焊片: 磷铜
Solder tab: Phosphor Bronze

				APPROVALS		DATE		GEPU歌普											
				DRAWN		ZHIWEI.CHEN		2015.07.07											
				CHECKED						TITLE:									
				APPROVALS						PART NO. GP01-2002WVS-NP									
				TOLERANCES ARE		30~0.1		±0.30		ANGLE		UNIT: mm		SCALE: 1:1		PROJ. 		SHEET 1 OF 1	
						10~30		±0.20											
						5~10		±0.15		±2°		DRAWING NO.							
						~ 5		±0.10											