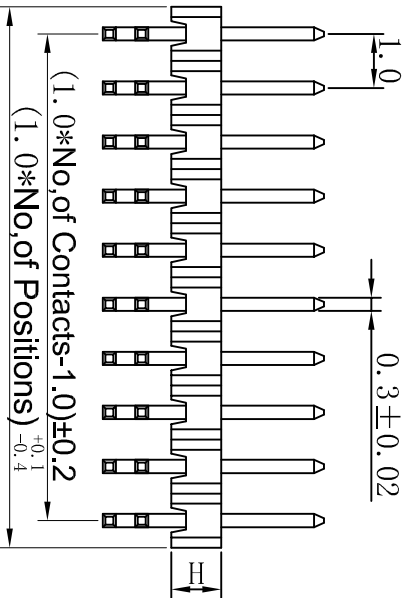
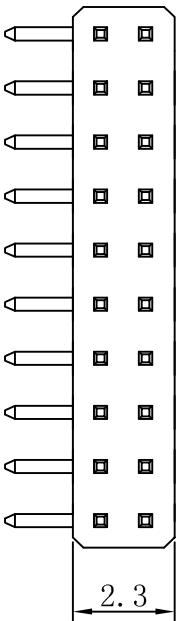



SPECIFICATIONS

Current Rating: 1Amps
Insulator resistance: 500 Megohms min.
Dielectric Withstanding: AC 500V
Operating Temperature: -40°C T0+105°C
Insulator Material: NY-6T
Contact Material: Brass
Plating: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

Plastic Base

Type	
H	1.0
PA	1.8
PB	3.0
PC	1.6

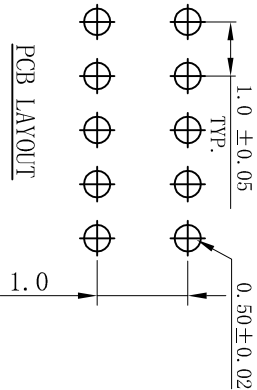

	A			NEW	
ECN NO.	REV.	DATE.		DESCRIPTION.	CHANGE. CHECK. APPRO.

APPROVALS		DATE	TITLE:		
DRAWN	ZHIWEI.CHEN	2015.07.07	GEPU歌普		
CHECKED					
APPROVALS					
TOLERANCES ARE			PART NO.	GP26-1010MR-2xNP	
			UNIT: mm	SCALE: 1:1	PROJ.
			DRAWING NO.		SHEET 1 OF 1