
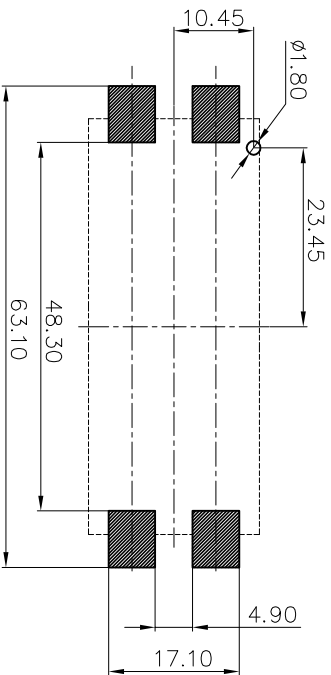
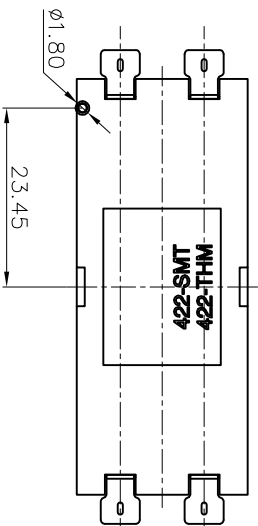


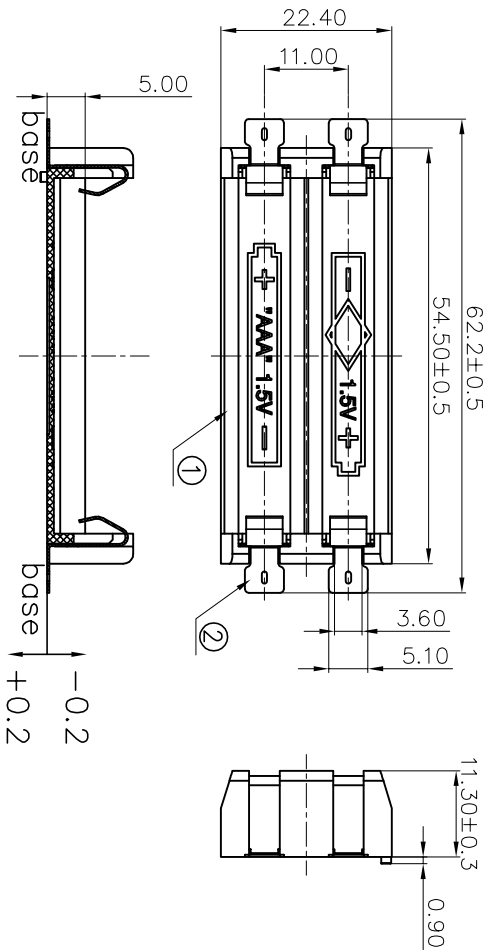

PCB Layout Diagram
Top View

NOTE:


1.MATERIAL:

- a.HOUSING:PA9T BLACK
- b.CONTACT:PHOSPHOR BRONZE
- (SURFACE PLATING: Sn100u"~120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -25°C~ +85°C

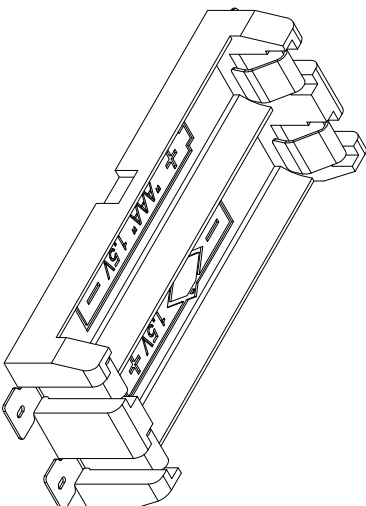

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2021.09.07	電池盒GP-AAA-07 SMT	
CHECKED				
APPROVALS				
TOLERANCES ARE		30~0.15 10~0.30 5~0.10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°
			PART NO.	GP07-CRAAA-07
			UNIT: mm	SCALE: 1:1
			DRAWING NO.	PROJ. 1 OF 1