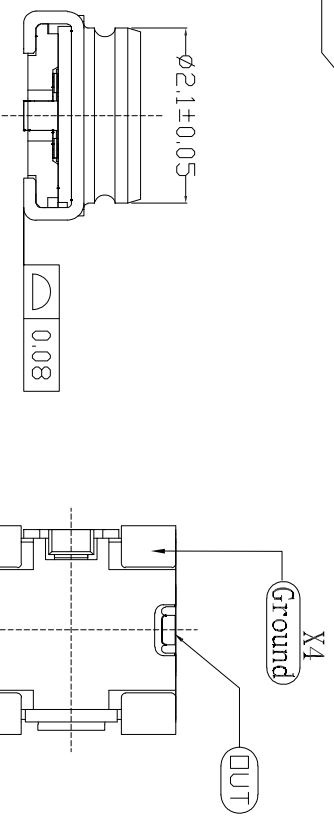
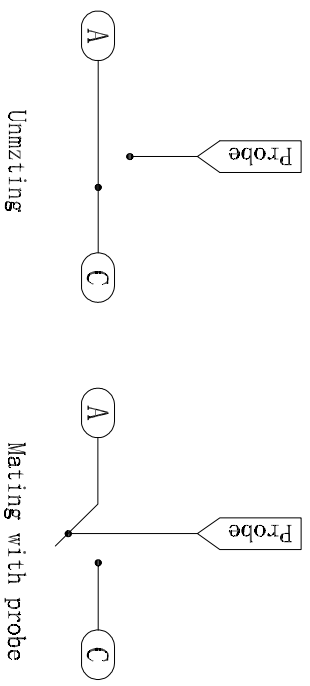
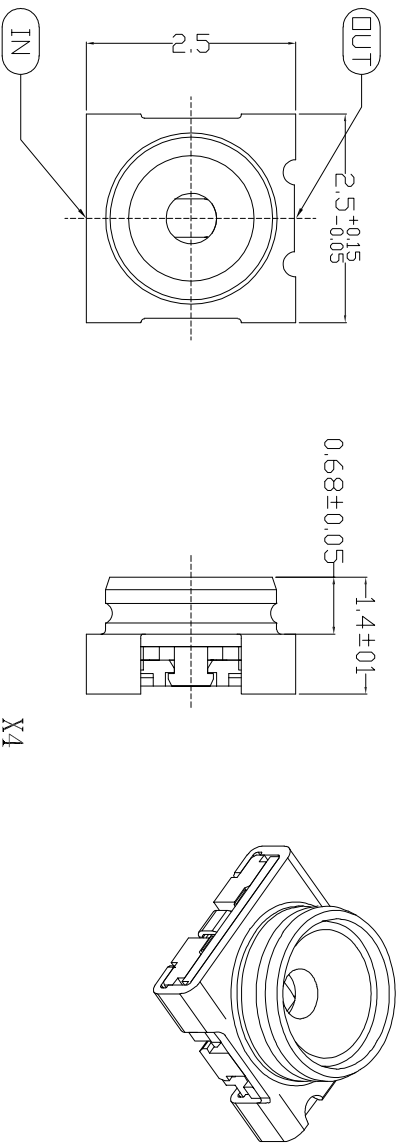


1. Material:
- Contact: High Performance Copper Alloy
 - Shielding Cover: High Performance Copper Alloy
 - Housing: Engineering Plastic.
2. Finish:
- Contact: 50u"Nickel Underplating Overall.
 - Gold Flash 2-3u" on Contact and Solder tail Area.
 - Shielding Cover: 50u" Nickel Underplating Overall.
 - Gold Flash min 1u" on & Solder tails Area.

APPROVALS			DATE		TITLE		
DRAWN	ZHIWEI.CHEN	2021.09.07	二代带开关天线座			GP-2A-02-01	
CHECKED							
APPROVALS							
TOLERANCES ARE			30~0.15	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
			10~0.30	±0.20			PROJ
			5~0.10	±0.15	±2°	DRAWING NO.	SHEET 1 OF 1
			~ 5	±0.10			