
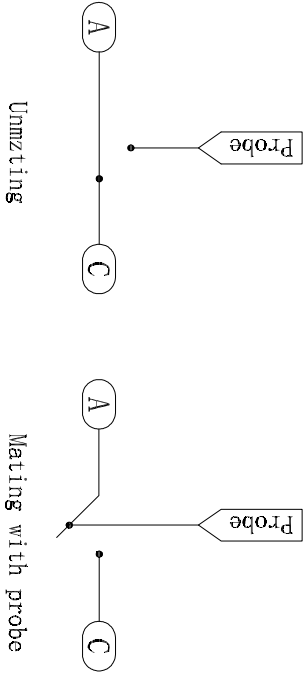
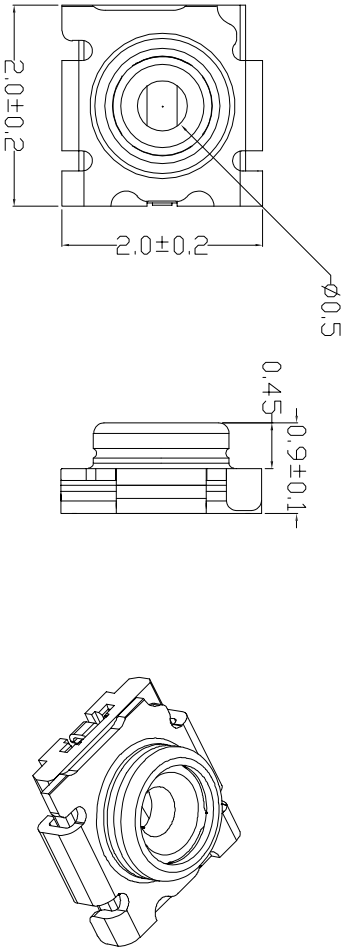


1. Material:
Contact: High Performance Copper Alloy
Shielding Cover: High Performance Copper Alloy
Housing: Engineering Plastic.
2. Finish:
Contact: 50u" Nickel Underplating Overall.
Gold Flash 2-3u" on Contact and Solder tail Area.
Shielding Cover: 50u" Nickel Underplating Overall.
Gold Flash min 1u" on & Solder tails Area.



Contact Pad
Shell Pad
Recommended PCB Layout

APPROVALS				DATE		TITLE	
DRAWN		ZHIWEI.CHEN		2021.09.07		三代带开关天线座	
CHECKED							
APPROVALS						PART NO. GP-3A-02-01	
TOLERANCES ARE		30~0.15 10~0.30 5~0.10 ~5		±0.30 ±0.20 ±0.15 ±0.10		ANGLE UNIT: mm SCALE: 1:1 PROJ: 	
DRAWING NO.						SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			