
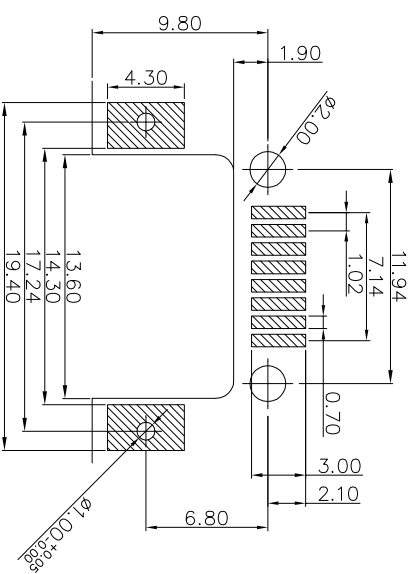
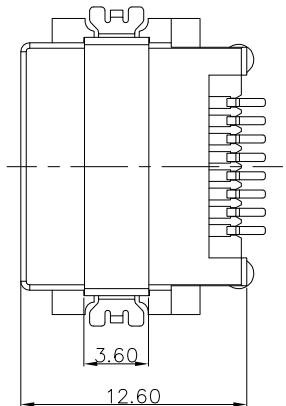
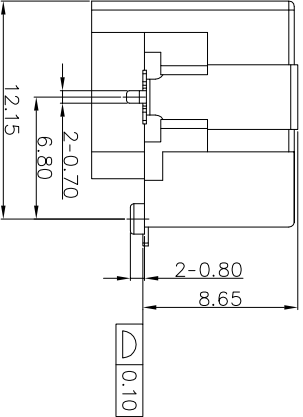


说明:
1. 材质:
胶芯: LCP, UL94V-0; COLOR: BLACK
端子: C5191
外壳: C2680

2. 电镀说明:
端子: 接触区域镀金, G, F
焊锡区域镀锡
全部区域镀底

3. 性能说明:
1) 电压: 150V AC RMS.
2) 额定电流: 1.5A.
3) 接触电阻: 40mΩ Max.
4) 绝缘电阻: 500MΩ MIN.
5) 绝缘耐压: 1000V AC.
6) 工作温度: -40° C TO +80° C.
7) 耐久性: 500 Mating Cycles MIN.

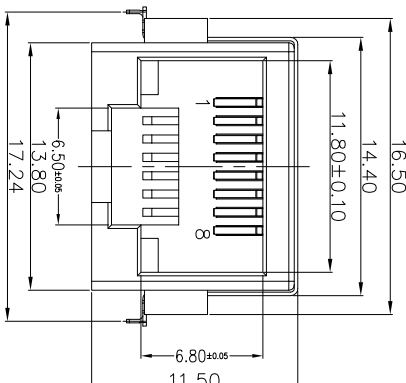

PIN	Name	Description
1	TX+	Tranceivele Data+(发信号+)
2	TX-	Tranceivele Data-(发信号-)
3	RX+	Receive Data+(收信号+)
4	N/C	Not connected(空脚)
5	N/C	Not connected(空脚)
6	RX-	Receive Data-(收信号-)
7	N/C	Not connected(空脚)
8	N/C	Not connected(空脚)

APPROVALS		DATE	TITLE:	
DRAWN	ZHWEI.CHEN	2015.07.07	RJ45沉板8.6半包 SMT	
CHECKED			PART NO. RJ45-9M11-CSN-BB-88-B86	
APPROVALS			SCALE: 1:1 PROJ: PROJ: SHEET 1 OF 1	

GEPU 歌普

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			