
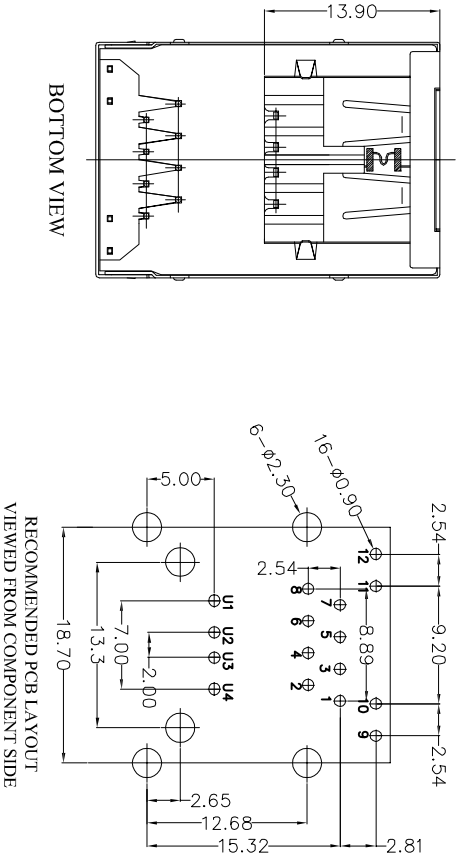


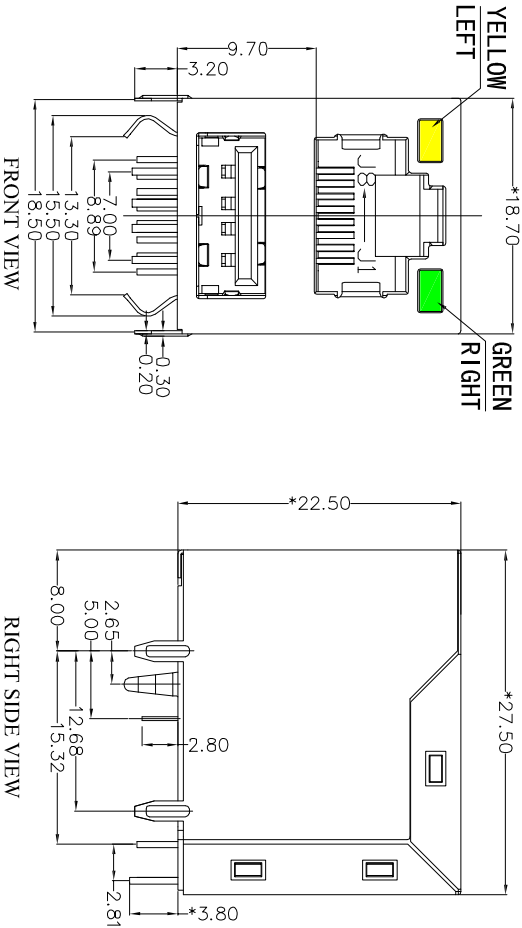

MATERIAL:

RJ45:

HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE Ø=0.46MM , G/FU" GOLD PLATING.

USB:

HOUSING: PBT,UL94V-0,WHITE.
RJ45 TERMINAL: PHOSPHOR BRONZE T=0.25MM , G/FU" GOLD PLATING.
SHIELD: ALLOY.


MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40 ℃~+85 ℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH "H"

ELECTRICAL:


VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 V/AC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

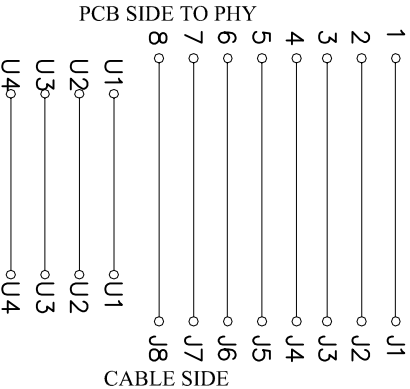

LED Specification

Standard LED Color	LED Wavelength	Forward(A)	Forward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

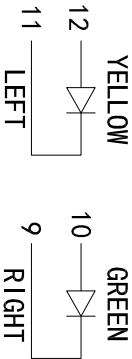

APPROVALS		DATE		TITLE:	
DRAWN	ZHWEI.CHEN	2015.07.07		RJ45+USB2.0	
CHECKED					
APPROVALS				PART NO.	
				RJ45-6W11-DDY6-AB-88-U1	
TOLERANCES ARE		30~0.15 10~0.20 5~0.10 ~ 5		ANGLE ±2°	
				UNIT: mm	
				SCALE: 1:1	
				PROJ. 1 OF 1	